

# Product Manual

## TP-P8-80050



## 1. Overview

### 1、 Application Scenarios

This high-voltage DC power supply is a specially customized power supply, featuring advantages such as small size, light weight, high efficiency, and built-in fan for heat dissipation. Its maximum working efficiency is  $\geq 97\%$ . The power module adopts an aluminum shell design, which is lightweight and aesthetically pleasing. With a waterproof design, it can serve as a substitute for imported high-voltage DC modular power supplies.

### 2、 Product Features

- DC-DC isolated power supply converter: It isolates and converts the input 800V direct current (DC) into 60V DC, with a total output power of 8KW.
- It has the characteristics of high power density, small size, and light weight.
- The design meets the requirements for power supply reliability: The input is equipped with over/under-voltage protection, and the output has functions such as over-voltage protection, current limiting, short-circuit protection, and over-temperature protection.

### 3、 Product Photos



### 4、 Main Specifications of the Product

| Input voltage range | Rated output voltage | Rated output power | Efficiency  | Voltage regulation accuracy | Output ripple and noise |
|---------------------|----------------------|--------------------|-------------|-----------------------------|-------------------------|
| 680~800Vdc          | 50 $\pm$ 0.5Vdc      | 8KW                | $\geq 97\%$ | $\leq \pm 2\%$              | $\leq \pm 2\%V_o$       |

## 2. Environmental conditions

| NO. | Program                 | Technical indicators       | Unit | Remark                      |
|-----|-------------------------|----------------------------|------|-----------------------------|
| 1   | Operating temperature   | -40℃~+50℃                  | ℃    |                             |
| 2   | Storage temperature     | -40℃~+80℃                  | ℃    | /                           |
| 3   | Relative humidity       | ≤95                        | %    | No condensation<br>(40℃±2℃) |
| 4   | Altitude                | 0-2000                     | m    |                             |
| 5   | Atmospheric pressure    | 76~106                     | K pa | /                           |
| 6   | Heat dissipation method | Self-contained air cooling | /    | /                           |

## 3. Electrical characteristics

| 1    | Input characteristics       |                        |      |                                                                                                                                                         |
|------|-----------------------------|------------------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| NO.  | Program                     | Technical requirements | Unit | Remarks                                                                                                                                                 |
| 1.1  | Rated input voltage         | 750                    | Vdc  |                                                                                                                                                         |
| 1.2  | Input voltage range         | 680~800                | Vdc  |                                                                                                                                                         |
| 1.3  | Maximum input current       | 14                     | A    | In=680Vdc, Po=8KW                                                                                                                                       |
| 2    | Output characteristics      |                        |      |                                                                                                                                                         |
| NO.  | Program                     | Technical requirements | Unit | Remarks                                                                                                                                                 |
| 2.1  | Output rated voltage        | 50                     | Vdc  | /                                                                                                                                                       |
| 2.2  | Output voltage range        | 47~50.5                | Vdc  |                                                                                                                                                         |
| 2.3  | Rated output current        | 160                    | A    | /                                                                                                                                                       |
| 2.4  | Maximum output current      | 175                    | A    | /                                                                                                                                                       |
| 2.5  | Rated output power          | 8                      | KW   | /                                                                                                                                                       |
| 2.6  | Output efficiency           | ≥97                    | %    | In=750Vdc, Half load                                                                                                                                    |
| 2.7  | Voltage regulation accuracy | ±1                     | %    | /                                                                                                                                                       |
| 2.8  | Source regulation rate      | ±1                     | %    | /                                                                                                                                                       |
| 2.9  | Load regulation rate        | ±1                     | %    | /                                                                                                                                                       |
| 2.10 | Output ripple and noise     | ±2                     | %/Vo | Bandwidth limitation:<br>20MHz. Connect a 10μF electrolytic capacitor and a 0.1μF film capacitor in parallel at the test end;<br>750V input, rated load |
| 2.11 | Temperature coefficient     | ±0.02                  | %/℃  | /                                                                                                                                                       |
| 2.12 | Output rise time            | ≤200                   | ms   | /                                                                                                                                                       |
| 2.13 | Output delay at power-on    | ≤5                     | S    | Rated input                                                                                                                                             |

| 2.14                                | Overshoot amplitude during power-on and power-off | $\Delta V: \leq \pm 5$                             | %    | /                                                     |
|-------------------------------------|---------------------------------------------------|----------------------------------------------------|------|-------------------------------------------------------|
| 2.15                                | Dynamic response overshoot                        | $\Delta V: \leq \pm 5$                             | %    | /                                                     |
| 2.16                                | Dynamic response recovery time                    | $\leq 2$                                           | ms   | 25%~50%~25% or<br>50%~75%~50% Load<br>variation, 25°C |
| <b>3 Protection Characteristics</b> |                                                   |                                                    |      |                                                       |
| NO.                                 | Program                                           | Technical requirements                             | Unit | Remarks                                               |
| 3.1                                 | Input under-voltage protection                    | 620~640                                            | Vdc  | The hysteresis is greater than 10V                    |
| 3.2                                 | Input under-voltage recovery                      | $\leq 650$                                         | Vdc  |                                                       |
| 3.3                                 | Input over-voltage protection                     | 820~840                                            | Vdc  | The hysteresis is greater than 10V                    |
| 3.4                                 | Input over-voltage recovery                       | $\geq 800$                                         | Vdc  |                                                       |
| 3.5                                 | Input reverse connection protection               | No damage will occur in case of reverse connection |      | Reverse connection of 800Vdc input                    |
| 3.6                                 | Output over-voltage protection                    | 54~56                                              | Vdc  | It can recover automatically                          |
| 3.7                                 | Output over-current protection                    | 180~190                                            | A    | It can recover automatically                          |
| 3.8                                 | Output short-circuit protection                   | Available                                          |      | It can recover automatically                          |
| 3.9                                 | Over-temperature protection                       | 80                                                 | °C   | Shell temperature                                     |
| 3.10                                | Over-temperature recovery                         | 65                                                 | °C   |                                                       |

## 4. Safety Characteristics

| NO. | Program                    |                     | Test conditions           | Remarks                                                                                               |
|-----|----------------------------|---------------------|---------------------------|-------------------------------------------------------------------------------------------------------|
| 1   | Withstand voltage strength | Input to output     | 2500Vdc/2mA/1min          | There is no arcing and no breakdown.                                                                  |
|     |                            | Input to enclosure  | 2000Vdc/2mA/1min          |                                                                                                       |
|     |                            | Output to enclosure | 500Vdc/2mA/1min           |                                                                                                       |
| 2   | Insulation resistance      | Input to output     | $\geq 10M\Omega @ 500Vdc$ | Under normal atmospheric pressure, when the relative humidity is 90% and the test DC voltage is 500V. |
|     |                            | Input and enclosure | $\geq 10M\Omega @ 500Vdc$ |                                                                                                       |
|     |                            | Output to enclosure | $\geq 10M\Omega @ 500Vdc$ |                                                                                                       |

## 5. Other Characteristics

### 1. Flammability requirements:

The flame-retardant grade of the PCBs used in the system should meet the V-0 requirements specified in GB4943.1-2011. The flame-retardant grade of the insulated cables should meet the

requirements specified in GB/T 18380.12-2008. The flame-retardant grade of other insulating materials should meet the V-1 requirements specified in GB4943.1-2011.

## 2. System noise

The system noise shall not exceed 55dB(A).

## 3. System reliability

MTBF≥100Khour ;

Test conditions: At 25°C, with rated input and full-load output, predicted by the stress method in MIL-HDBK-217F Notice2.


## 4. Protection Level

The protection level should meet the requirements of IP54 grade. Water accumulation on the top of the power supply housing is not allowed.

## 5. Three Protections (Moisture-proof, Mildew-proof, Salt Fog-proof)

The printed circuit boards, plug-in components and other circuits inside the product should be treated with anti-humidity, anti-mildew and anti-salt spray measures. Among them, the anti-salt spray ability should meet the requirements of Table 9 in GB/T 4797.6, so that the product can operate normally in outdoor humid and salt spray environments.


# 6. Product Label

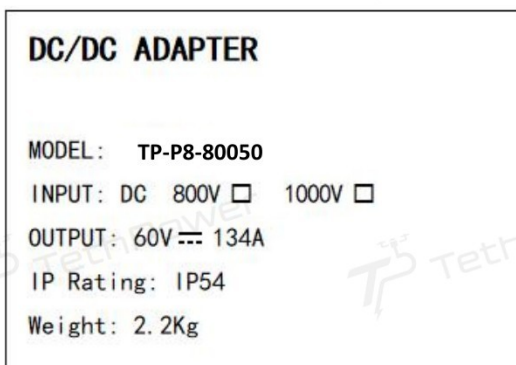

# 7. Mechanical dimensions and definitions of connectors

## 1、 Schematic diagram of the product installation dimensions

| Parameters       | Indicator            |
|------------------|----------------------|
| Shell dimensions | 187mm*185mm*70mm±1mm |

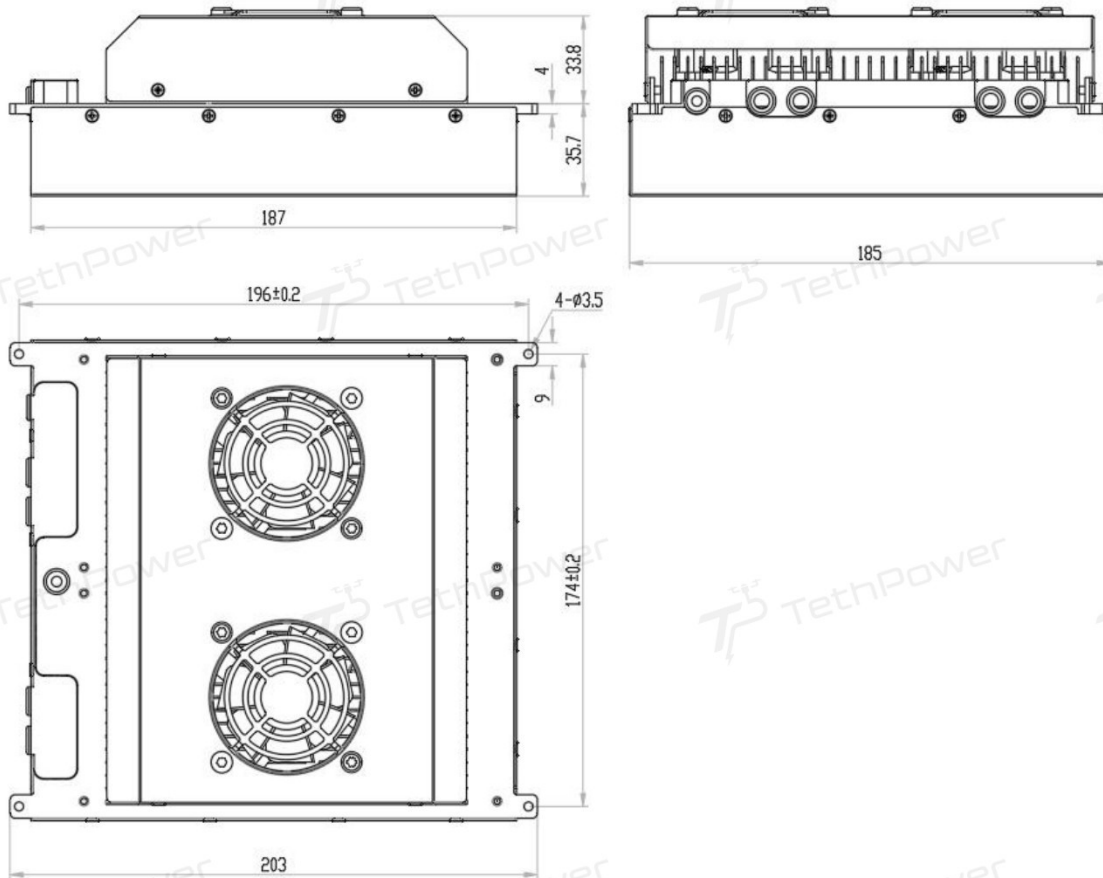

## 2、 Product weight:

About 2.2KG

## 8. Packaging, Transportation, and Storage

### 1. Packaging

The product name, model, manufacturer's logo, the inspection certificate of the manufacturer's quality department, the manufacturing date, etc. shall be marked on the packaging box; an accessory list shall be included in the packaging box.

### 2. Transportation

The product shall be packed in a firm packaging box during transportation. The outside of the box shall comply with the relevant national standards and shall be marked with signs such as "Handle with Care" and "Keep Away from Moisture". The packaging box containing the product is allowed to be transported by any means of transportation. During transportation, direct exposure to rain and snow as well as mechanical impacts shall be avoided.

### 3. Storage

When the product is not in use, it should be stored in the packaging box. The ambient temperature of the warehouse should be between -10°C and 40°C, and the relative humidity should not exceed 80%. There should be no harmful gases, flammable and explosive products, or corrosive chemical substances in the warehouse. Also, there should be no

strong mechanical vibration, impact, or strong magnetic field. The packaging box should be placed on a cushion at least 20 cm above the ground, and at least 50 cm away from the walls, heat sources, windows, or air inlets. Under the conditions specified herein, the general storage period is 2 years. After more than 2 years, re-inspection should be carried out.

## 9. Safety Precautions

1. Once the safety protection of the equipment is damaged, the equipment must stop operating and be dealt with in accordance with the relevant maintenance regulations.
2. When the power supply equipment is transferred from a cold environment to a warm one, condensation may pose a risk of electric leakage. Therefore, the grounding requirements must be strictly implemented; Only qualified personnel are allowed to connect the equipment to the power supply.
3. After cutting off the power supply, the equipment must be shut down for five minutes to allow sufficient time for the capacitors to discharge before any maintenance work on the power supply equipment can be carried out.
4. Pay attention to safety during use: Avoid touching the areas with safety warning signs and high-voltage signs by hand to prevent electric shock and scalding.

## 10. Referenced Standards and Specifications

GB/T 2423.1-2001 Environmental testing for electrical and electronic products - Part 2: Test methods/Test A: Low temperature

GB/T 2423.2-2001 Environmental testing for electrical and electronic products - Part 2: Test methods/Test B: High temperature

GB/T 2423.3-1993 Basic environmental test procedures for electrical and electronic products - Test Ca: Method for test of constant damp heat

GB/T 2423.4-1993 Basic environmental test procedures for electrical and electronic products - Test Db: Method for test of cyclic damp heat

GB/T 2423.5-1995 Environmental testing for electrical and electronic products - Part 2: Test methods/Test Ea and guidance: Shock

GB/T 2423.6-1995 Environmental testing for electrical and electronic products - Part 2: Test methods/Test Eb and guidance: Collision

GB/T 2423.8-1995 Environmental testing for electrical and electronic products - Part 2: Test methods/Test Ed: Free fall

GB/T 2423.10-1995 Environmental testing for electrical and electronic products - Part 2: Test methods/Test Fc and guidance: Vibration (sinusoidal)

GB/T 2423.11-1997 Environmental testing for electrical and electronic products - Part 2: Test methods/Test Fd: Broadband random vibration - General requirements

GB/T 2423.22-2002 Environmental testing for electrical and electronic products - Part 2: Test N: Temperature change

GB/T 14508-93 Mechanical environmental conditions for the freight transportation on classed highways

EN55022: 1998 Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement

EN55024: 1998 Information technology equipment - Immunity characteristics - Limits and methods of measurement

CEI IEC 61000-4-2 2001 Electromagnetic compatibility - Testing and measurement techniques - Electrostatic discharge immunity test

CEI IEC 61000-4-3 2002 Electromagnetic compatibility - Testing and measurement techniques

- Radiated, radio-frequency, electromagnetic field immunity test
- CEI IEC 61000-4-4 1998 Electromagnetic compatibility - Testing and measurement techniques
- Electrical fast transient/burst immunity test
- CEI IEC 61000-4-5 1999 Electromagnetic compatibility - Testing and measurement techniques
- Surge (impact) immunity test
- CEI IEC 61000-4-6 2001 Electromagnetic compatibility - Testing and measurement techniques
- Immunity to conducted disturbances, induced by radio-frequency fields
- CEI IEC 61000-4-8 1993 Electromagnetic compatibility - Testing and measurement techniques
- Power frequency magnetic field immunity test
- CEI IEC 61000-4-11 1994 Electromagnetic compatibility - Testing and measurement techniques - Voltage dips, short interruptions and voltage variations immunity test
- CEI IEC 61000-4-29 2000 Electromagnetic compatibility - Testing and measurement techniques - Immunity to voltage dips, short interruptions and voltage variations on DC input ports
- IEC 61000-3-2 2001 Electromagnetic compatibility - Limits - Limits for harmonic current emissions (equipment input current per phase  $\leq 16$  A)
- IEC 61000-3-3 1994 Electromagnetic compatibility - Limits - Voltage fluctuations and flicker in low-voltage supply systems (equipment rated current  $\leq 16$  A)
- GB4943-2001 Safety of information technology equipment
- YD/T 282-2000 General test methods for the reliability of communication equipment
- GB/T 13722-92 Technical requirements and test methods for mobile communication power supplies
- YD/T 732-95 Test methods for DC-DC converters for telecommunication
- YD/T 731-2002 High-frequency switching rectifiers for telecommunication
- GB14287.1-2005 Electrical fire monitoring system - Part 1: Electrical fire monitoring equipment