Product Manual

Nozzle cleaning accessories



Tel / Whatsapp: +86 17714312943

TP-SG Dual-purpose Nozzle

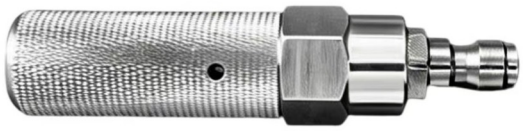

Main Technical Specifications

Order Number	Project	Technical Parameter
1	Product Material	Forged aluminum
2	Weight	71g
3	Length	80mm
4	Connection Method	Quick plug male connector
5	Functional Characteristics	Compatible with foam and clear water modes

Dual-purpose nozzle only: 1/4-inch male quick-connect with a matching female coupling (reference opening approx. 11.8 mm). Reference hose-side threads: M14 × 1.5 male and M14 female (approx. 1.5 mm pitch). The quick-connect designation does not specify an NPT or BSP thread. Confirm hose-side connection and seal before ordering.

TP-SG-Bullet Nozzle



Main Technical Specifications

Order Number	Project	Technical Parameter
1	Product Material	304 Stainless Steel
2	Weight	55g
3	Length	81.5mm
4	Connection Method	Quick plug male connector
5	Functional Characteristics	Concentrated water jet for powerful flushing.

The bullet nozzle uses a 3 mm spray orifice. This is the outlet size.

TP-SG-Foam Nozzle



Main Technical Specifications

Order Number	Project	Technical Parameter
1	Product Material	Brass and stainless steel
2	Weight	300g
3	Length	180mm
4	Connection method	Quick plug male connector
5	Functional Characteristics	Generates dense foam.

TP-SG Universal Rotating Nozzle



Main Technical Specifications

Order Number	Project	Technical Parameter
1	Product Material	304 Stainless Steel
2	Weight	55g
3	Length	53mm
4	Connection Method	Quick-connect male connector (1/4)
5	Functional Characteristics	Spray direction is adjusted manually.

TP-SG Sectoral Nozzle



Main Technical Specifications

Order Number	Project	Technical Parameter
1	Product Material	304 Stainless Steel
2	Weight	18g
3	Length	30mm
4	Connection Method	Quick-connect male connector (1/4)
5	Functional Characteristics	0°/15°/25°/40° for cleaning operations